
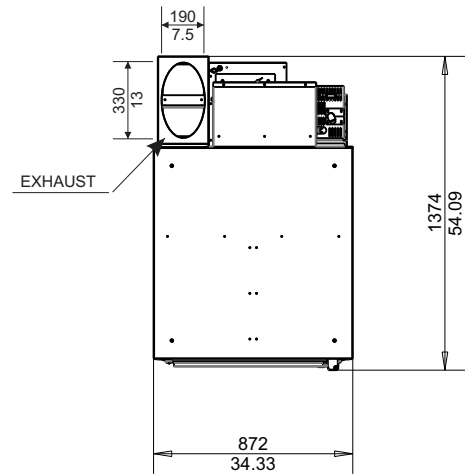
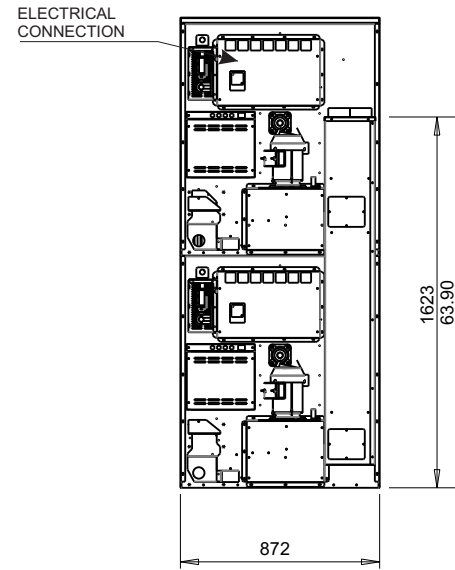



A

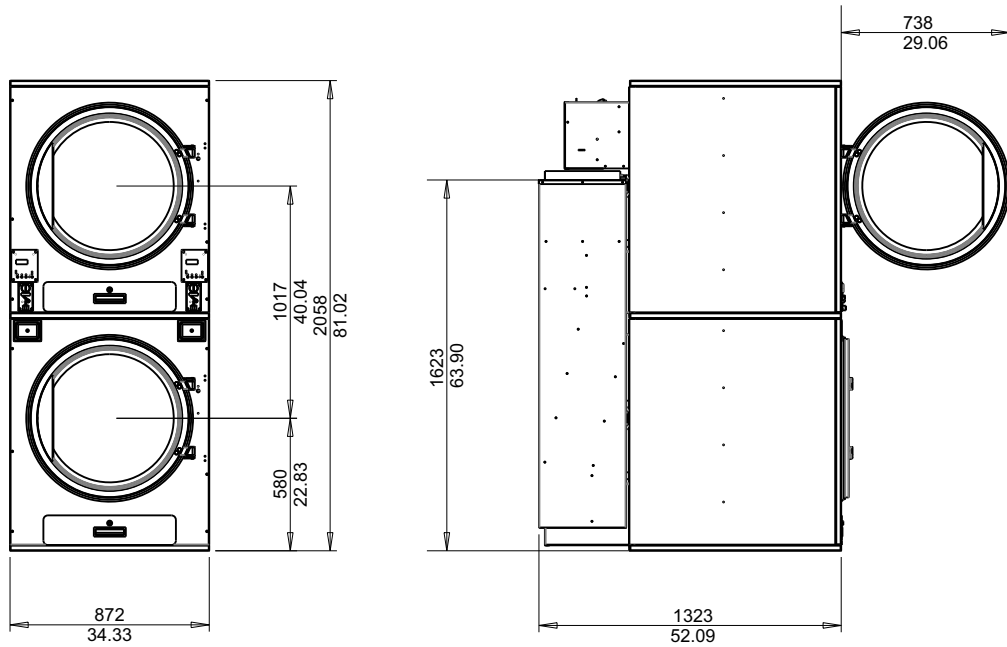

DE-250	Metric	USA		
Capacity	kg	lbs	22.73	50
Dimensions				
A - Width	mm	in	872	34.33
B - Depth	mm	in	1323	52.09
C - Height	mm	in	2058	81.02
Drying Cylinder				
Diameter	mm	in	828	32.60
Depth	mm	in	749	29.49
Volume	liters	cu ft	400	14.24
Drive Information				
Cylinder motor	kW	HP	0.18	0.25
Blower motor	kW	HP	0.37	0.5
Gas Heat				
Airflow	cu m/min	CFM	20	720
Gas consumption	kcal/hr	BTU/hr	52000	206353
Gas inlet size	NPT		1/2	
Exhaust connection	mm	in	250	9.8
Electrical, 208-230VAC, 3PH	Breaker	FLA	10	3.15
Electrical, 440-460VAC, 3PH	Breaker	FLA	10	1.8
Electrical, 208-230VAC, 1PH	Breaker	FLA	10	7
Electrical, 120VAC, 1PH	Breaker	FLA	15	11
Net weight	kg	lbs	350	772
Shipping weight	kg	lbs	375	827
Electric Heat				
Airflow	cu m/min	CFM	20	720
Electric consumption	kW		24	
Exhaust connection	mm	in	250	9.8
Electrical, 208-230VAC, 3PH	Breaker	FLA	80	67
Electrical, 440-460VAC, 3PH	Breaker	FLA	40	34
Net weight	kg	lbs	324	714
Shipping weight	kg	lbs	350	772

Electrical consumption, gas consumption, airflow, capacity, and electrical specifications are per cylinder

REV	BY	DATE	REV. DESCRIPTION
A2	AFA	04-26-2024	Clarified per cylinder info
DRAWN BY		DATE	 Panama City Beach, FL Phone: 850-249-2222 Fax: 850-249-2226 www.bandtech.com
A. Adcock		12-9-2022	
CHECKED BY		DATE	
P. Noblit		12-9-2022	
DESCRIPTION			
General Technical Specifications DE-250 Stack Dryer			
DATE	FILE NAME	SHEET	
12-9-2022	DE-250-General-Specifications.cdr	1 OF 1	