

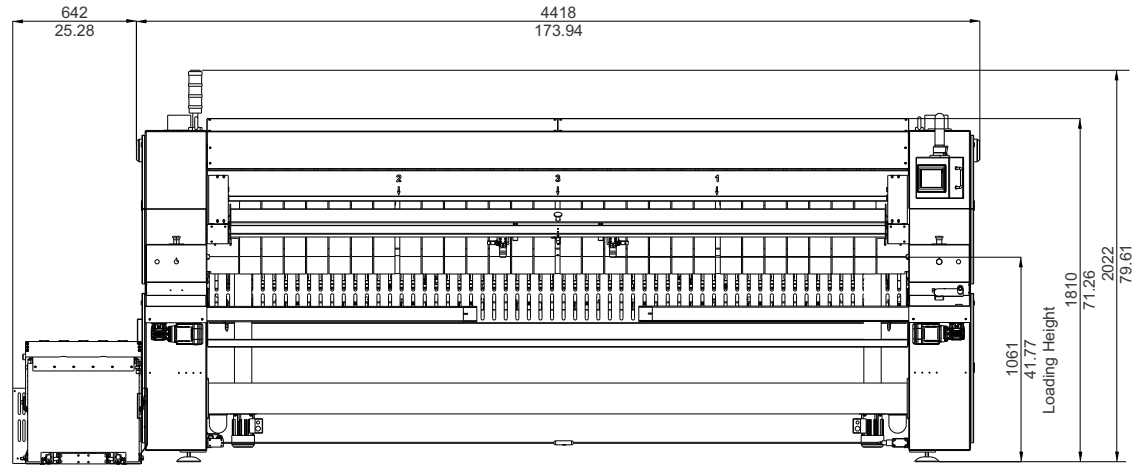



A

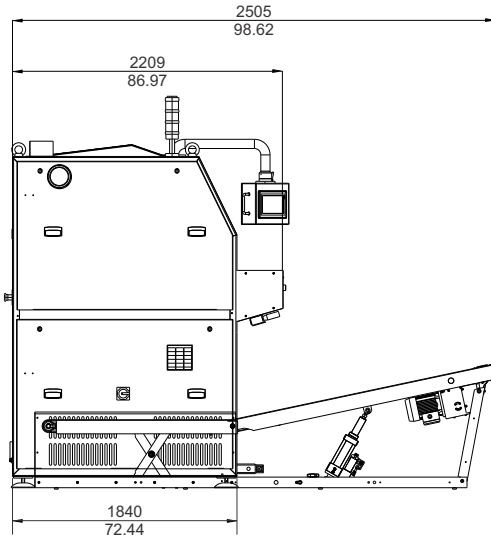

MODEL	Metric	US	IF-24130	
<b>NUMBER OF ROLLS</b>			1	
Roll Diameter	mm	inch	600	24
Working Width	mm	inch	3300	130
<b>DIMENSIONS</b>				
A - Width (with stacker)	mm	inch	5060	199.2
B - Depth (with stacker)	mm	inch	2505	98.6
C - Height	mm	inch	1810	71.3
<b>WEIGHT AND SHIPPING</b>				
Net Weight	kg	lbs	3250	7150
Shipping Weight	kg	lbs	3350	7370
<b>ELECTRICAL SERVICE:</b>				
208-240VAC, 50/60Hz, 3PH	Amps	Breaker	24	30
380-480VAC, 50/60Hz, 3PH	Amps	Breaker	14	20
<b>PNEUMATICS:</b>				
Inlet	mm		12	
Consumption	L/h	cfm	21000	12.3
<b>GAS:</b>				
Heat Input	kCal/hr	BTU/hr	70550	279965
Gas Inlet	inch		1	
<b>STEAM:</b>				
Steam Consumption	kg/hr	BHP	145	9.3
Steam Inlet	inch		1	
Steam Return	inch		1/2	
<b>EXHAUST</b>				
Diameter (2 per machine)	mm	inch	120	4.7
Air Flow	cu m/hr	cfm	2000	1200

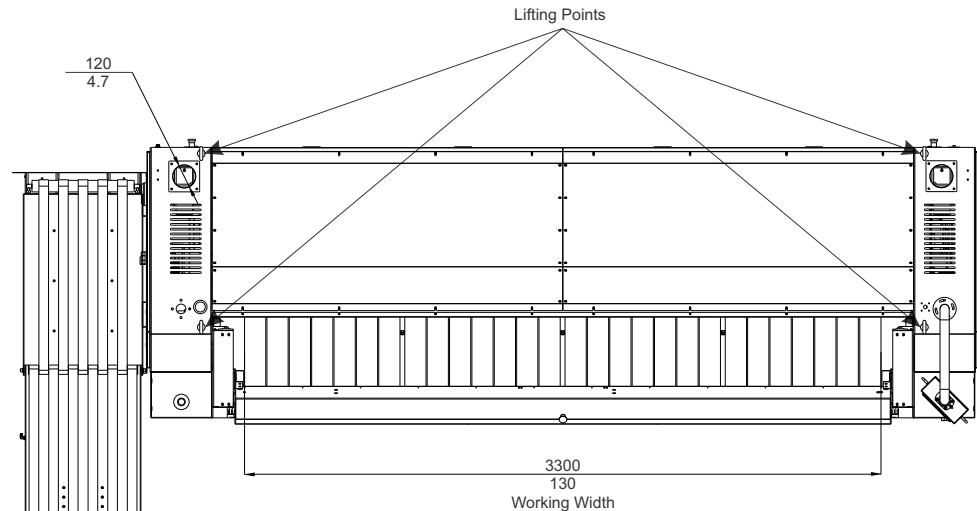

REV	BY	DATE	REV. DESCRIPTION
A2	AFA	7-19-2016	Updated dimensions
DRAWN BY		DATE	 Panama City Beach, FL Phone: 850-249-2222 Fax: 850-249-2226 www.bandtech.com
A. Adcock		9-16-2015	
CHECKED BY		DATE	
C. Oswald		9-16-2015	
DESCRIPTION			
General Technical Specifications <b>IF-24130</b>			
DATE	FILE NAME	SHEET	
9-16-2015	IF-24130-General.cdr	1 OF 1	